


BSA02

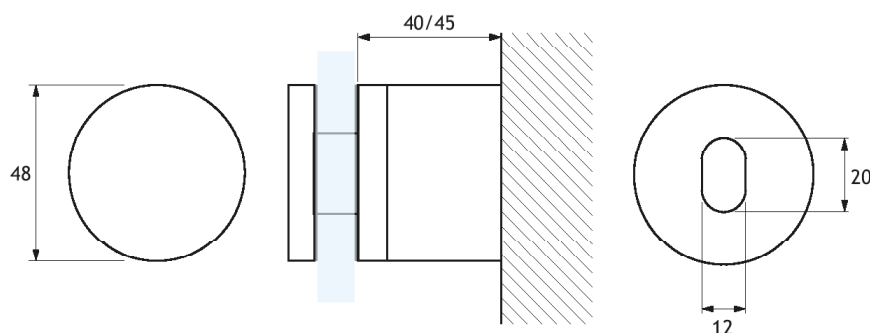

Distanziale cilindrico regolabile senza vite in vista con collare per vetri stratificati in forte spessore


La regolazione di profondità 0-5 mm si ottiene agendo dall'esterno a vetro montato tramite apposito utensile (cod BSAT)
La corretta centratura (± 4 mm) è raggiunta grazie al foro asolato della base

Testato per resistenza ai carichi statici distribuiti di 3,00 Kn secondo lo schema riportato dopo le schede dei distanziali BS03 e BS03B certificato presso l'Università di Brescia

Filettatura M10

Barra filettata M12 lungh. 140 mm completa di dado e rondella (cod BSAR) fornita a parte

Realizzato in acciaio inox Aisi 316

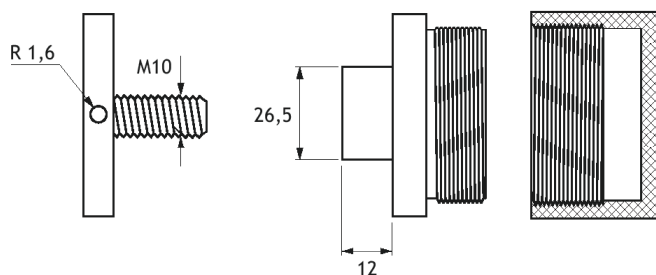

Adjustable glass cylindrical spacer without screw at sight for high thickness laminated glass

0-5 mm depth adjustment is achieved by a special tool (code BSAT) working from outside with glass installed

The correct centering is obtained thanks to the slotted hole of the fixing plate

Tested for 3,00 Kn resistance to static loading according to the diagram shown after BS03 and BS03B data sheet, official test results by University of Brescia

M10 threaded hole

140 mm M12 threaded rod with nut and washers available extra (code BSAR)

Aisi 316 stainless steel manufacturing

