


## RSZKV/RSZKV2

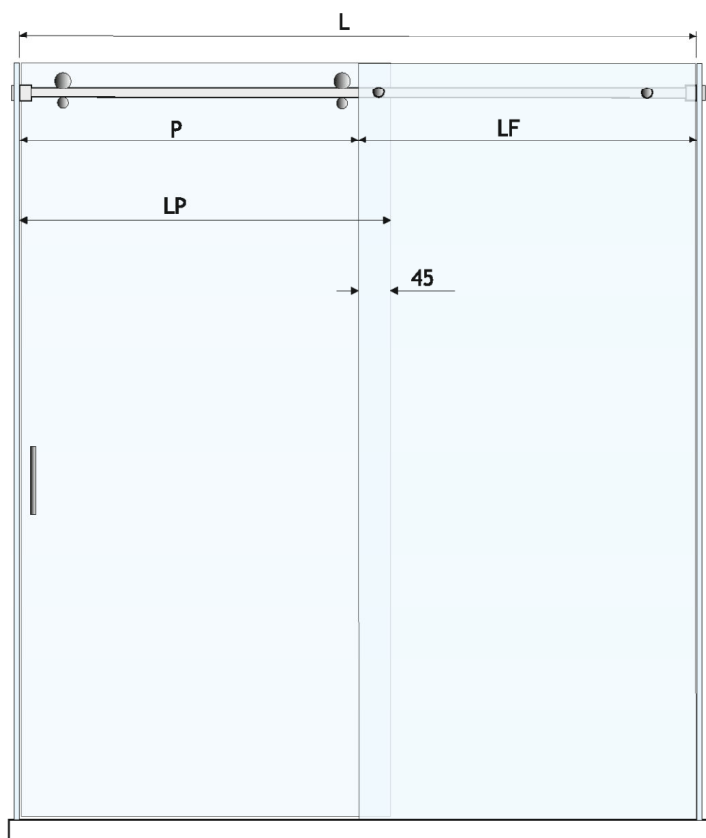

**Dimensionamento dei vetri per kit RSZKV (nicchia muro/vetro) e RSZKV2 (nicchia vetro/vetro) calcolato per vetri spessore 8mm**

Larghezza del vano (L) = 1200-2000 mm  
Larghezza del vetro fisso (LF) =  $\frac{1}{2} L$   
Larghezza della porta (LP) =  $\frac{1}{2} L + 45$  mm  
Passaggio (P) =  $\frac{1}{2} L - 45$  mm

Suggeriamo l'uso della guarnizione adesiva a palloncino AS2R (disponibile a parte) da applicare sul bordo dell'anta. In questo caso ridurre LP di 4 mm.

MD system per la guida, il fissaggio e la finitura del bordo inferiore della cabina è disponibili a parte

Maniglie consigliate: serie DH07, DH17, DH27, GRH03, SK06

•Disponibili per il montaggio del vetro fisso: canaline SP03, IC02 e ICS02

**Glass sizing for RSZKV set (glass/wall niche) and RSZKV2 set (glass/glass niche) calculated on 8 mm glass thickness**

Niche width (L) = 1200-2000 mm  
Fixed glass width (LF) =  $\frac{1}{2} L$   
Door width (LP) =  $\frac{1}{2} L + 45$  mm  
Passage (P) =  $\frac{1}{2} L - 45$  mm

We suggest to apply AS02R adhesive ball seal (available extra) on the edge of the glass door. In this case, reduce LP size of 4 mm.

MD system, used to drive the door and to finish the lower edge of the room, is available separately

Suggested handles: DH07, DH17, DH27, GRH03, SK06

•Available for side glass fastening: SP03, IC02 and ICS02 «U» channels

