


## RSZKM

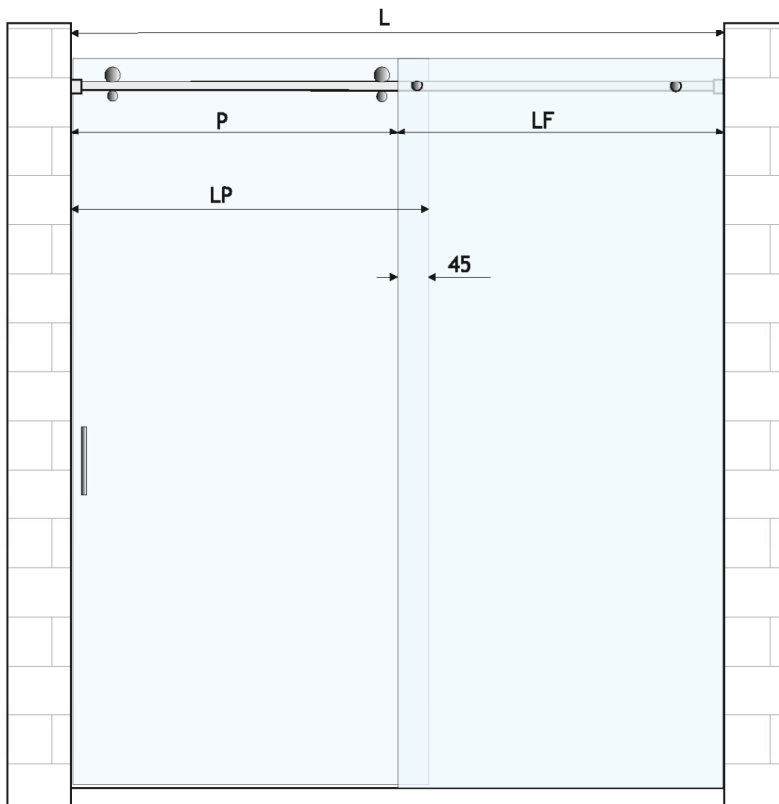

Dimensionamento dei vetri per kit RSZKM (nicchia a muro)  
calcolato per vetri spessore 8mm

Larghezza del vano (L) = 1200-2000 mm  
Larghezza del vetro fisso (LF) =  $\frac{1}{2}$  L  
Larghezza della porta (LP) =  $\frac{1}{2}$  L + 45 mm  
Passaggio (P) =  $\frac{1}{2}$  L - 45 mm

Suggeriamo l'uso della guarnizione adesiva a palloncino AS02R  
(disponibile a parte) da applicare sul bordo dell'anta. In questo  
caso ridurre LP di 4 mm.

MD system per la guida, il fissaggio e la finitura del bordo  
inferiore della cabina è disponibili a parte  
Maniglie consigliate: serie DH07, DH17, DH27, GRH03, SK06

•Disponibili per il montaggio del vetro fisso: canaline SP03,  
IC02 e ICS02

Glass sizing for RSZKM set (wall niche) calculated on 8 mm  
glass thickness

Niche width (L) = 1200-2000 mm  
Fixed glass width (LF) =  $\frac{1}{2}$  L  
Door width (LP) =  $\frac{1}{2}$  L + 45 mm  
Passage (P) =  $\frac{1}{2}$  L - 45 mm

We suggest to apply AS02R adhesive ball seal (available extra)  
on the edge of the glass door. In this case, reduce LP size of 4  
mm.

MD system, used to drive the door and to finish the lower  
edge of the room, is available separately  
Suggested handles: DH07, DH17, DH27, GRH03, SH06

•Available for side glass fastening: SP03, IC02 and ICS02 «U»  
channels

